


OS1E/IL RANGE - LOAD TO DEFLECTION GRAPH

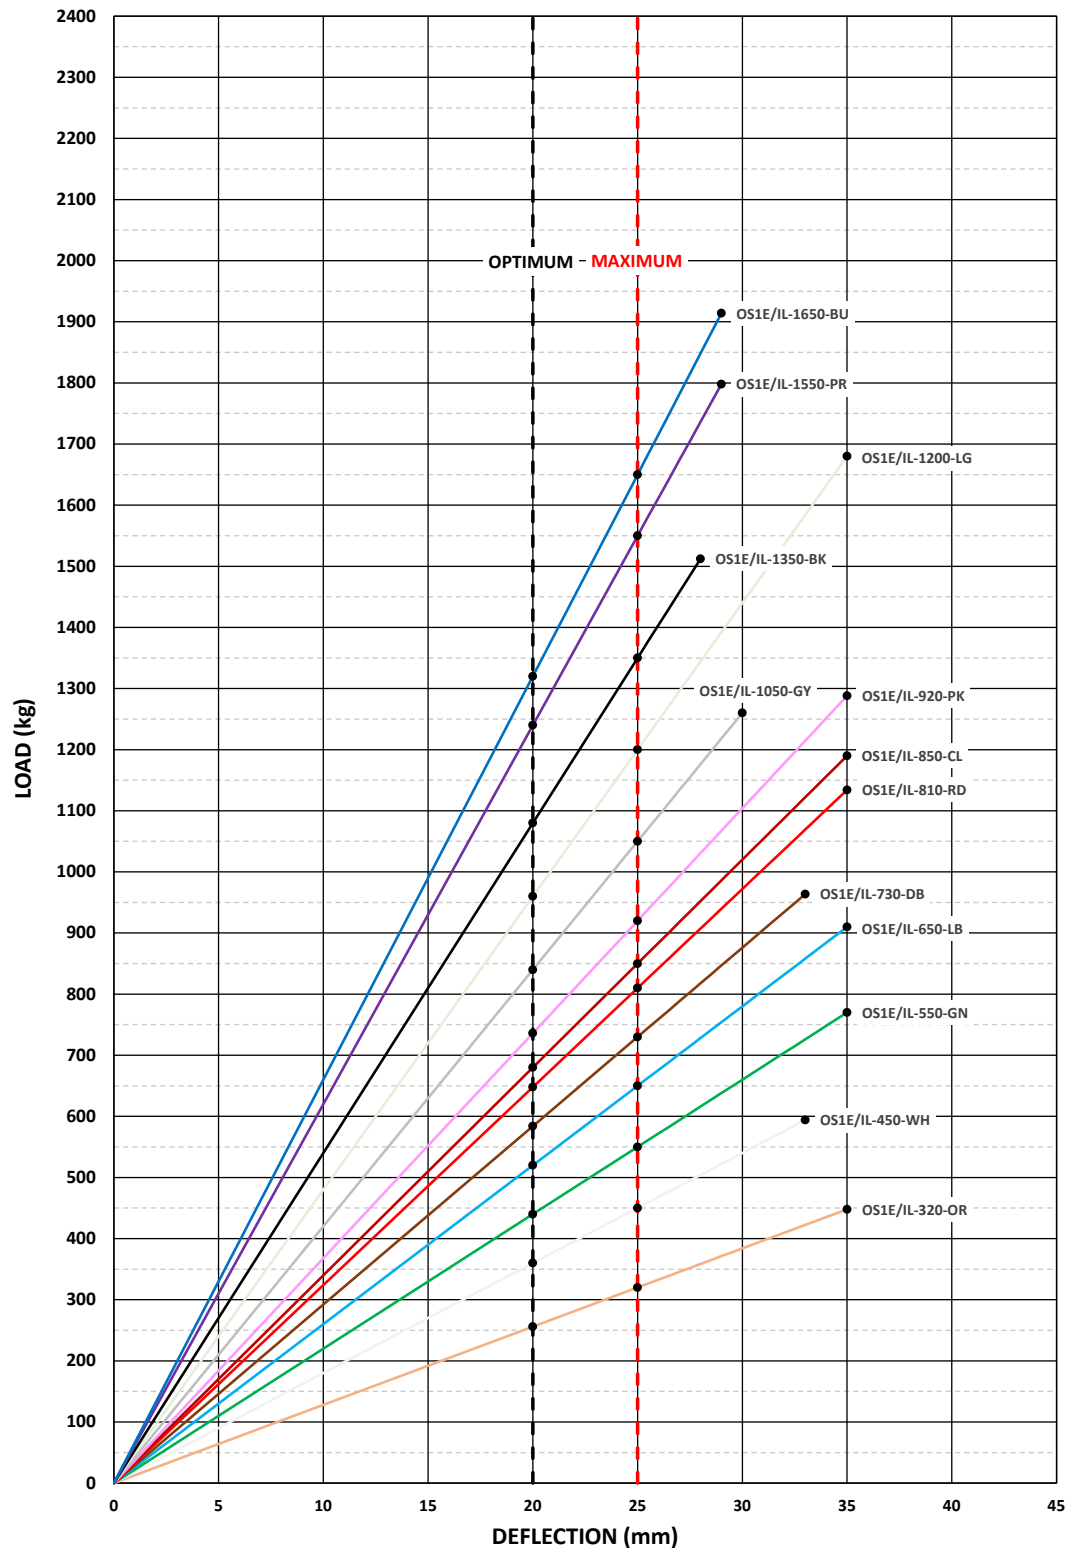

OPTIMUM DEFLECTIONS

OS1E/IL-1650-BU	1320kg
OS1E/IL-1550-PR	1240kg
OS1E/IL-1350-BK	1080kg
OS1E/IL-1200-LG	960kg
OS1E/IL-1050-GY	840kg
OS1E/IL-920-PK	736kg
OS1E/IL-850-CL	680kg
OS1E/IL-810-RD	648kg
OS1E/IL-730-DB	584kg
OS1E/IL-650-LB	520kg
OS1E/IL-550-GN	440kg
OS1E/IL-450-WH	360kg
OS1E/IL-320-OR	256kg

TITLE

OS1E/IL RANGE - INTERNAL LEVELLING AVM
LOAD TO DEFLECTION GRAPH



ISOLATED SYSTEMS LIMITED, ADAMS CLOSE,
HEANOR GATE INDUSTRIAL PARK, HEANOR,
DERBYSHIRE, DE75 7SW
T. +44 (0)1773 761226 E. sales@isolatedsystems.com
www.isolatedsystems.com

0	24/05/2022	ORIGINAL ISSUE.	M.A.T.	P.M.
REV	DATE	DESCRIPTION	DRN	APRD
REVISION HISTORY				
DOCUMENT NO.			REV	0
OS1E_IL-GRAPH				