


OS1-HD/IL RANGE - LOAD TO DEFLECTION GRAPH

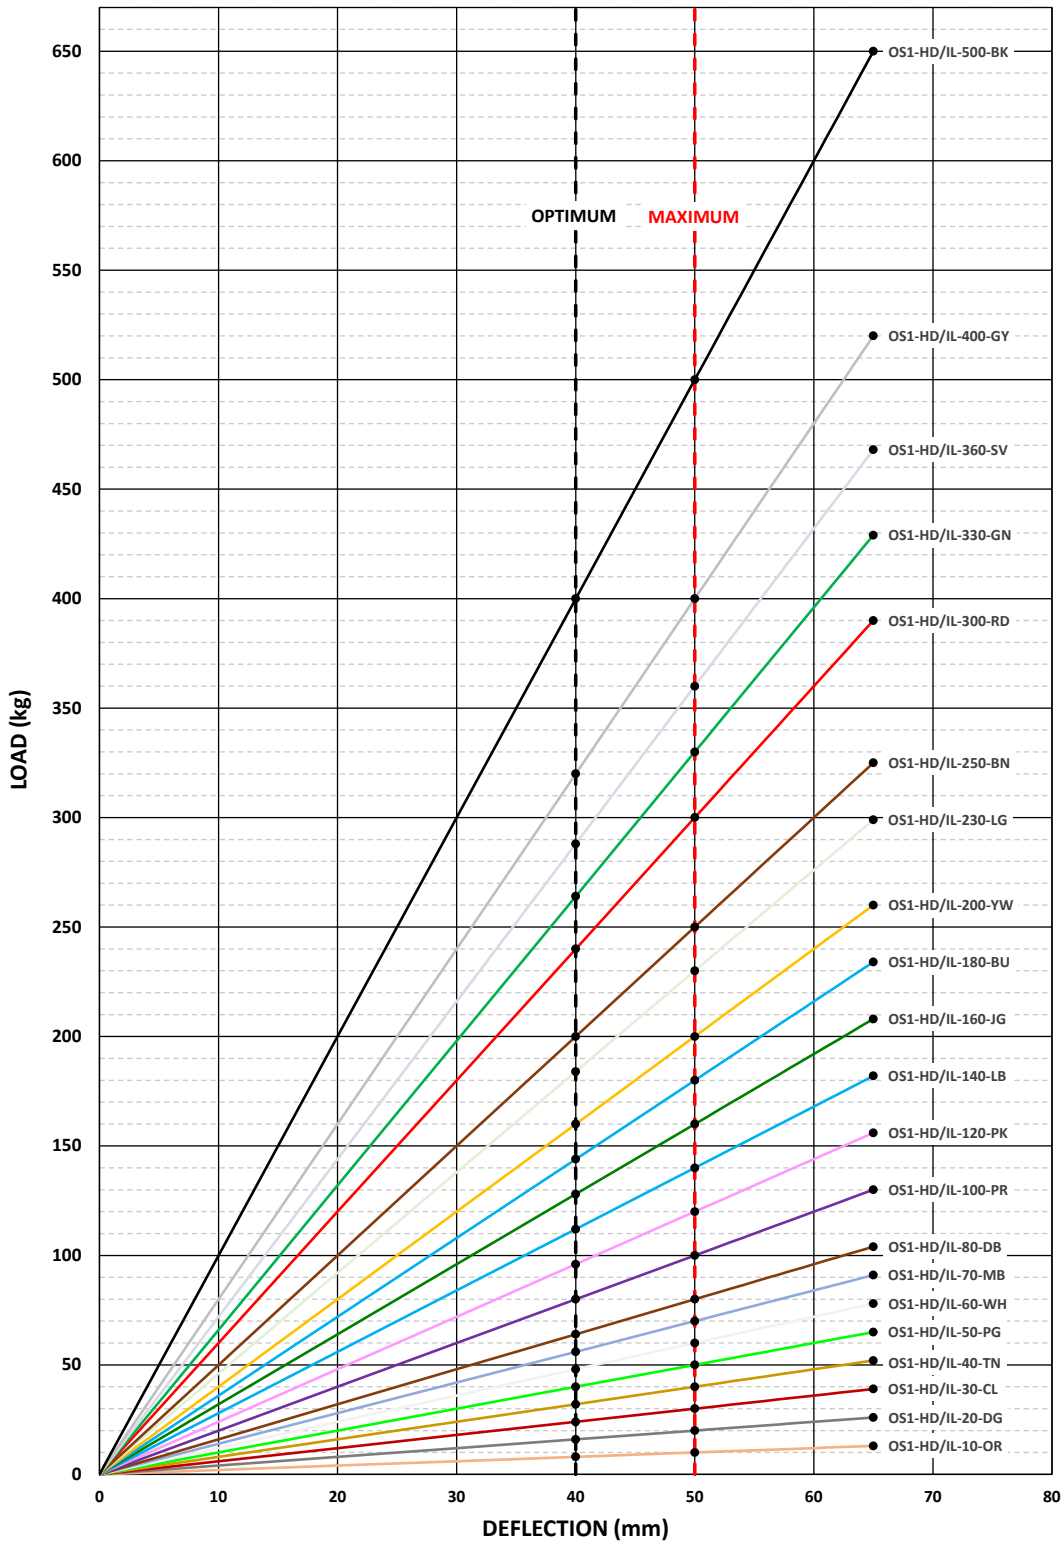

OPTIMUM DEFLECTIONS

OS1-HD/IL-500-BK	400kg
OS1-HD/IL-400-GY	320kg
OS1-HD/IL-360-SV	288kg
OS1-HD/IL-330-GN	264kg
OS1-HD/IL-300-RD	240kg
OS1-HD/IL-250-BN	200kg
OS1-HD/IL-230-LG	184kg
OS1-HD/IL-200-YW	160kg
OS1-HD/IL-180-BU	144kg
OS1-HD/IL-160-JG	128kg
OS1-HD/IL-140-LB	112kg
OS1-HD/IL-120-PK	96kg
OS1-HD/IL-100-PR	80kg
OS1-HD/IL-80-DB	64kg
OS1-HD/IL-70-MB	56kg
OS1-HD/IL-60-WH	48kg
OS1-HD/IL-50-PG	40kg
OS1-HD/IL-40-TN	32kg
OS1-HD/IL-30-CL	24kg
OS1-HD/IL-20-DG	16kg
OS1-HD/IL-10-OR	8kg

NOTE - End of each line/curve denotes point at which spring becomes solid.

TITLE

OS1-HD/IL RANGE - INTERNAL LEVELLING AVM
LOAD TO DEFLECTION GRAPH



ISOLATED SYSTEMS LIMITED, ADAMS CLOSE,
HEANOR GATE INDUSTRIAL PARK, HEANOR,
DERBYSHIRE, DE75 7SW

T. +44 (0)1773 761226 E. sales@isolatedsystems.com
www.isolatedsystems.com

0	24/05/2022	ORIGINAL ISSUE.	M.A.T.	P.M.
REV	DATE	DESCRIPTION	DRN	APRD
REVISION HISTORY				
DOCUMENT NO.			REV	
OS1-HD_IL-GRAPH				0